

ATN PIAF1010 MAST BOOM LIFT - CRAWLER



MAIN FEATURES

Working height 10.05m / 32.97ft
Horizontal outreach 3.35m / 10.99ft
Ground pressure 69 kN/m²
Fully hydraulic (Drive and elevation)


▲ STANDARD EQUIPMENT

- Progressive hydraulic movement controls
- Drive and directional movement controls carried out with hydraulic joystick controls
- 200kg load capacity
- 575 Ah 24 V traction battery with centralised charging
- On-board HF 85 A charger
- Two drive speeds
- 2 x 110° rotating turret
- 30% gradeability
- Possible to work at maximum height
- Sling rings
- Flashing lights
- Battery charge indicator with cutoff at 80%
- Tilt indicator with alarm
- Overload sensor
- Hour meter

★ ACCESSORIES & OPTIONS

- Non-marking rubber tracks
- Compressed air line
- Maintenance and battery charging kit
- Wall mounted charger
- Food grade hydraulic oil
- Biodegradable hydraulic oil
- Extreme cold Kit
- Power supply in the platform
- Movement cut off when tilt > 3°
- Drive alarm
- Customer colour(s) paint

ATN PIAF1010 MAST BOOM LIFT - CRAWLER

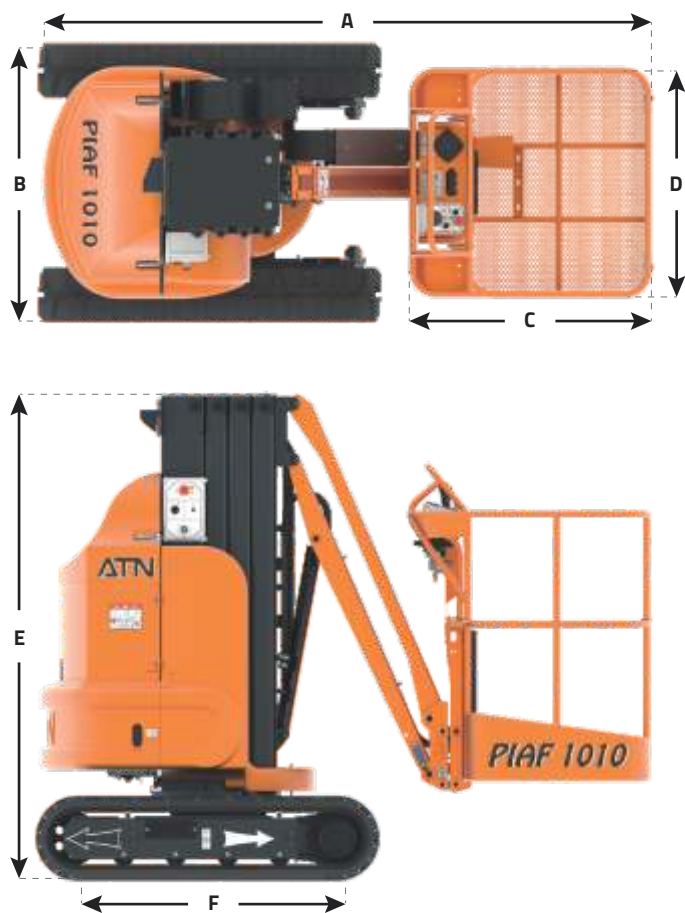

| | |
|--|------------------|
| Working height | 10.05m / 32.97ft |
| Floor height | 8.05m / 26.41ft |
| Maximum horizontal outreach | 3.35m / 10.99ft |
| Load capacity (Interior, 2 people, wind 0 km/h) | 200kg / 441lbs |
| Load capacity (Exterior, 1 people, wind < 45 km/h) | 200kg / 441lbs |

| | | |
|---|-----------------|----------------|
| A | Length | 2.74m / 8.98ft |
| B | Width | 1.20m / 3.93ft |
| C | Platform length | 0.80m / 2.62ft |
| D | Platform width | 0.93m / 3.05ft |
| E | Height | 2.12m / 6.95ft |
| F | Wheelbase | 1.15m / 3.77ft |

| | |
|-----------------------------|---------------------|
| Turret rotation | 2x110° |
| Drive speed (stowed) | 1.5km/h / 0.93mph |
| Drive speed (raised) | 0.6km/h / 0.37mph |
| Gradeability (stowed) | 30% |
| Maximum tilt. | 3° |
| Inside turning radius (Ri) | 0m / 0ft |
| Outside turning radius (Re) | 1m / 3.28ft |
| Total weight | 2780kg / 6128lbs |
| Ground pressure | 69kN/m ² |

P1010

