

DINGLI

JCPT1008HA

SELF PROPELLED SCISSOR LIFT - ELECTRIC

SPECIFICATIONS


| Size | Metric | British |
|-------------------------------------|--------------|-----------------|
| Max. Working Height A | 10.00m | 32ft 10in |
| Max. Platform Height B | 8.00m | 26ft 3in |
| Overall Length C | 2.48m | 8ft 2in |
| Overall Width D | 0.83m | 2ft 9in |
| Overall Height(Rails Up) E | 2.36m | 7ft 9in |
| Overall Height(Rails Down) F | 2.00m | 6ft 7in |
| Platform Size(Length×Width) | 2.27m×0.81m | 7ft 5in×2ft 8in |
| Platform Extension Size G | 0.90m | 2ft 11in |
| Ground Clearance(Stowed/Raised) | 0.10m/0.019m | 4in/1in |
| Wheelbase H | 1.87m | 6ft 2in |
| Turning Radius(Inside/Outside) | 0m/2.1m | 0in/6ft 11in |
| Tyres | φ381×127mm | φ381×127mm |

| Performance | | |
|----------------------|----------|----------|
| S.W.L | 230kg | 507lb |
| S.W.L On Extension | 113kg | 249lb |
| Max. Occupants | 2 | 2 |
| Gradeability | 25% | 25% |
| Travel Speed(Stowed) | 3.5km/h | 3.5km/h |
| Travel Speed(Raised) | 0.8km/h | 0.8km/h |
| Max. Working Slope | 1.5°/3° | 1.5°/3° |
| Up/Down Speed | 30/34sec | 30/34sec |

| Weight | | |
|-----------------------------------|--------|--------|
| Overall Weight(Lead-acid Battery) | 2190kg | 4828lb |
| Overall Weight(Lithium Battery) | 2130kg | 4695lb |

| Power | | |
|----------------|-------------|-------------|
| Hydraulic Tank | 20L | 20L |
| Battery | 4×6V/185Ah | 4×6V/185Ah |
| Charger | 24V/30A | 24V/30A |
| Lifting Motor | 24VAC/3.5kW | 24VAC/3.5kW |

* The platform height plus 2m (7ft in British standard) is the working height.
Standards Compliance

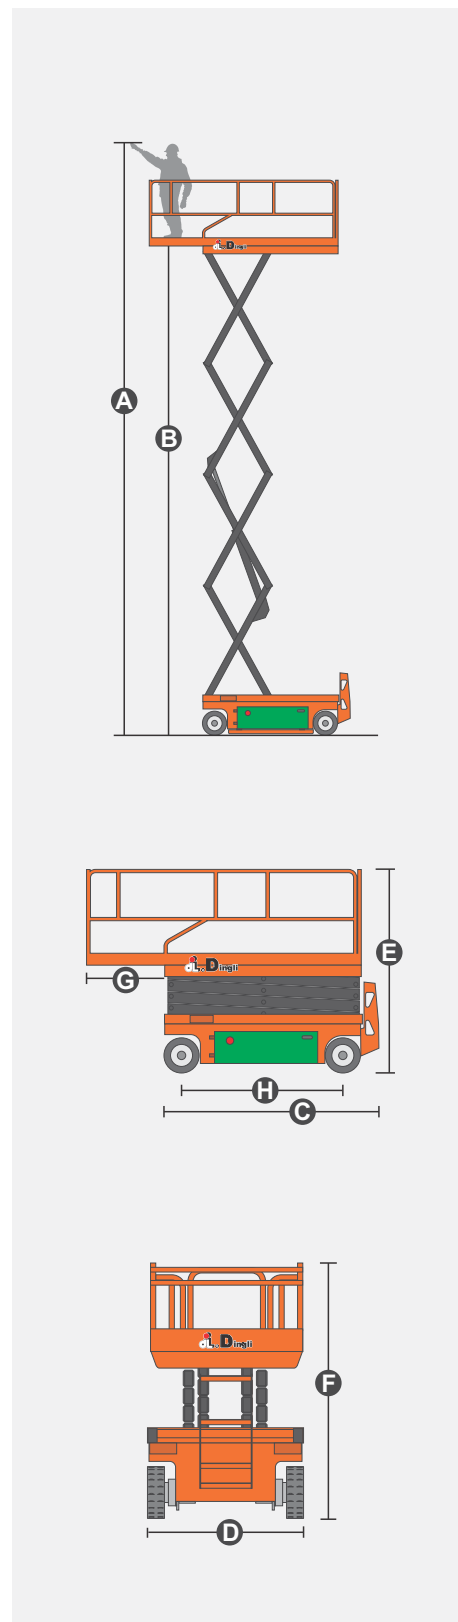

DINGLI JCPT1008HA

SELF PROPELLED SCISSOR LIFT - ELECTRIC



FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Drivable At Full Height
- Non-Marking Tires
- 4x2 Drive
- Four-Wheel Braking
- Emergency Descent System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Safety Arm For Troubleshooting
- Standard Transport Forklift Holes
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Automatic Pothole Protection
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Platform Load Sense System

Optional Items

Factory Battery

- Lead-Acid Battery **
- Lithium Battery

Factory Hydraulic Oil

- No. 46 Hydraulic Oil (Mineral Oil)**

Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform
- Ultrasonic Sensor on Platform